

## 100 Watt Volume Control Models



XVC100

XVCD100

XVCS100



XVCO100

XVCD100IR

XVCS100IR



### 100 Watt Volume Control Features:

- Power handling: 100 Watts continuous
- Adjustable impedance matching for up to 8 speaker pairs (1,2,4,8 pairs)
- Attenuation: 11 steps plus Off; max 42 dB
- Contact type: Make before break
- Frequency range: 20Hz-20kHz  $\pm$  1dB
- 14 gauge Quick Connect speaker terminals
- Mounting: Minimum 20 cubic inch or open J-box
- Almond, Black, Ivory and White inserts and knobs / sliders included in box
- Compatible with screwless decora style faceplates
- XVCO100 mounted in durable weather-proof grey housing
- XVCD100IR / XVCS100IR - IR carrier frequency 38 KHz
- RoHS compliant
- UL Listed

## 50 Watt Volume Control Models



XVC50



XVCD50



XVCS50

### 50 Watt Volume Control Features:


- Power handling: 50 Watts continuous
- Adjustable impedance matching for up to 8 speaker pairs (1,2,4,8 pairs)
- Attenuation: 11 steps plus Off; max 42 dB
- Contact type: Make before break
- Frequency range: 20hz-20kHz  $\pm$  1dB
- 14 gauge Quick Connect speaker terminals
- Mounting: Minimum 20 cubic inch or open J-box
- White faceplate and knob included
- XVCS50 includes Almond, Black, Ivory and White inserts and sliders
- Compatible with screwless decora style faceplates
- UL Listed

#### 2X, 4X, and 8X selectable impedance switching (4X shown)

Xantech PA amplifier or equivalent



CB18

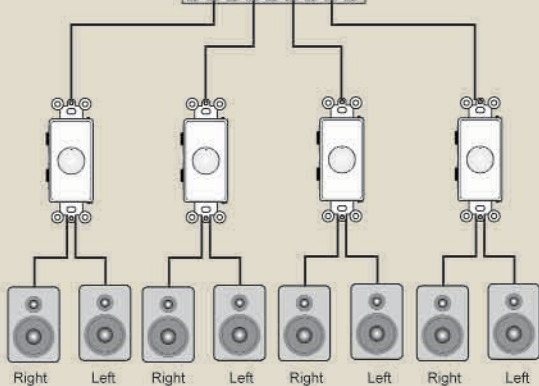

#### 1X selectable impedance switching

Xantech PA amplifier or equivalent

